



**ACCU-LINK**



**MEGADYNE**

# ACCU-LINK

Accu-Link is the Megadyne's link belt, created and developed as an alternative to classical rubber V-belts. Megadyne's Accu-Link combines superior strength and durability with quick and easy assembly and installation. The original concept is to give a fast replacement to classical V-belts in case of break. Despite this, thanks to the performance of link belts, today Accu-Link is used in a very wide range of applications as original equipment.

Accu-Link is a link belt: it means it is made of several links assembled all together. Thanks to this, belts can have every length just by modifying the number of links.

Links are made with a polyurethane polymer reinforced by a multilayer woven polyester fabric. The design of the links and the state-of-art manufacturing process allow superior performances and finishing quality. Accu-Link is ground to get a smooth and precise side edge and section, leading to a low vibrating belt and a smooth and silent transmission.


The belt is delivered already assembled and pre-tensioned to reduce the elongation especially during the early stage of its start-up.

## **Main features and advantages:**

- **EASY TO ASSEMBLE**  
Accu-Link can be assembled without any tool and in a matter of seconds.
- **EASY TO INSTALL**  
Accu-Link can be adapted to every length; in case of difficult layout or when taking the drive apart would take too long. Acculink can be installed open and closed afterwards, in a very easy and fast way.
- **SMALL INVENTORY**  
With one roll of Accu-Link it is possible to get any length of classical V-belts; with one roll per section, inventories will be much smaller, easier and cheaper to manage.
- **HIGH POWER RATE**  
Accu-Link has power ratings similar to classical V-belts.
- **HIGH RESISTANCE TO ENVIRONMENT**  
Thanks to its state-of-the-art materials, Accu-Link can withstand to salt, chemicals, mineral pure oils and greases. This increases the life time compared to standard rubber V-belts.
- **HIGH TEMPERATURE RESISTANCE**  
Accu-Link can operate un a wide range of temperature:  
-25 °C / +80 °C (-13 °F / 176 °F)
- **HIGH RESISTACE TO HARSH ENVIRONMENT**  
Accu-Link is suited for harsh environment where it can last ever longer than standard rubber V-belts.
- **QUIET AND SMOOTH RUNNING**  
Thanks to the superior finishing, Accu-Link may run quieter and smoother than a V-belt.



## Technical calculation

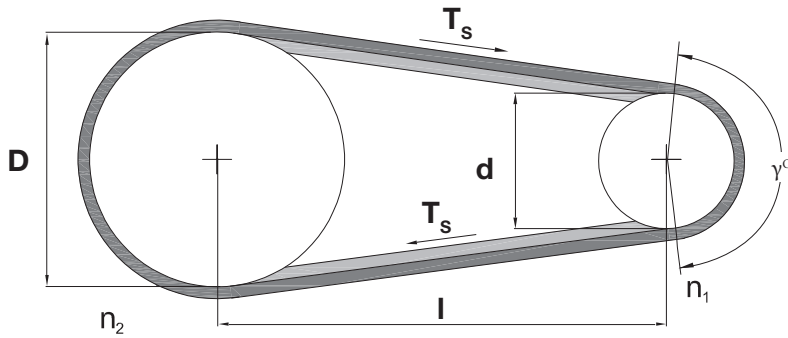

### SYMBOL UNIT DEFINITION SYMBOL


|  |   |
|--|---|
| $C_\gamma$ correction factor                 | $n_2$ (RPM) speed of bigger pulley (slower)   |
| $n_1$ (RPM) speed of smaller pulley (faster) | $P$ (kW) power to be transmitted              |
| $d$ (mm) pitch diameter of smaller pulley    | $P_c$ (kW) corrected power                    |
| $D$ (mm) pitch diameter of bigger pulley     | $P_b$ (kW) basic performance of a single belt |
| $l$ (mm) center distance                     | $P_a$ (kW) actual belt power                  |
| $i$ transmission ratio                       | $Q$ number of belts                           |
| $T_s$ (N) static belt tension                | $v$ (m/s) peripheral belt speed               |
| $\gamma$ ( $^\circ$ ) arc of contact         | $F_s$ service factor                          |

## CHOICE OF BELT SECTION

To choose between the sections, to find out the corrected power ( $P_c$ ) it is first necessary to calculate:

$$P_c = P \times F_s$$

Table 1: belt section selection

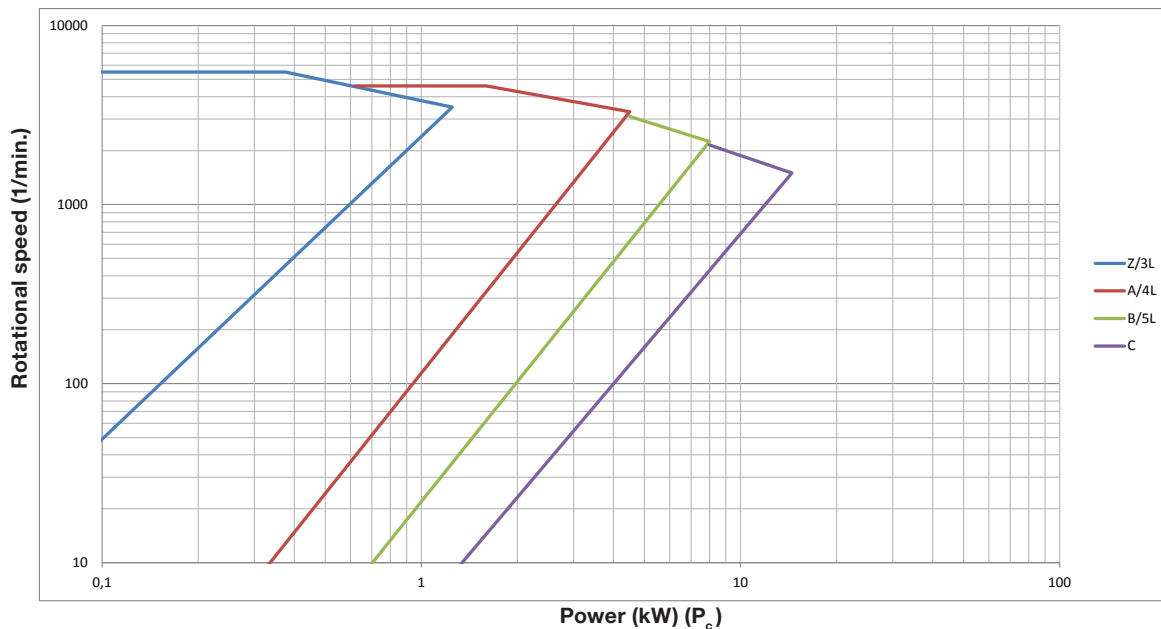

## DETERMINATION OF ACTUAL POWER RATING

The actual power rating  $P_a$  is given by the drive working conditions:

$$P_a = P_b \times C_\gamma$$

where  $P_b$  is the power base of the belt and  $C_\gamma$  is the arc of contact correction factor as per following table.

Table 2: arc of contact correction factor  $C_\gamma$

The arc of contact is calculated as follows:

$$\gamma = 180 - (57 \times [(D-d):l])$$

| Arc of contact $\gamma$ | 180° | 175° | 170° | 165° | 160° | 155° | 150° | 145° | 140° | 135° | 130° | 125° | 120° | 115° | 110° | 105° | 100° |
|-------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| $C_\gamma$              | 1,00 | 0,99 | 0,98 | 0,96 | 0,95 | 0,93 | 0,92 | 0,90 | 0,89 | 0,87 | 0,86 | 0,84 | 0,82 | 0,80 | 0,78 | 0,76 | 0,74 |



**Table 3: service factor  $F_s$**

| DRIVES   |   |          |           |         |          |           |
|--|---|----------|-----------|---------|----------|-----------|
| (1)<br>AC electric motors: high slip, squirrel cage, synchronous<br>DC electric motors: parallel excitation<br>Multi-cylinder internal combustion engines<br>Gas or steam turbines | (2)<br>AC electric motors: high torque, high slip, single phase, wound rotor, commutator<br>DC electric motors > series and compound excitation<br>Single-cylinder internal combustion engines with direct coupling or with countershaft<br>Steam engines |          |           |         |          |           |
| Applications   | Daily operating hours   |          |           |         |          |           |
|  | 0-8 (1)   | 8-16 (1) | 16-24 (1) | 0-8 (2) | 8-16 (2) | 16-24 (2) |
| Light use<br>Classical industrial drives up to 5 kW<br>Fans, pumps, compressors<br>Light conveyors   | 1,0   | 1,1      | 1,2       | 1,1     | 1,2      | 1,3       |
| Normal use<br>Drives up to 15 kW<br>Fans, pumps, compressors, line shafts, machine tools, punches, generators<br>Heavy conveyors   | 1,1   | 1,2      | 1,3       | 1,2     | 1,3      | 1,4       |
| Heavy use<br>Textile machines<br>saw mills, woodworking machines, brick machines, piston compressors, paper mills, positive blowers  | 1,2   | 1,3      | 1,4       | 1,4     | 1,5      | 1,6       |

**DETERMINATION OF NUMBER OF BELTS**



The number of belts comes from the following formula:

$$Q = P_c : P_a$$

The final number of belts is given by rounding up Q to the next higher integer number.

**Transmittable Power**

**Table 4 - Z/3L profile**

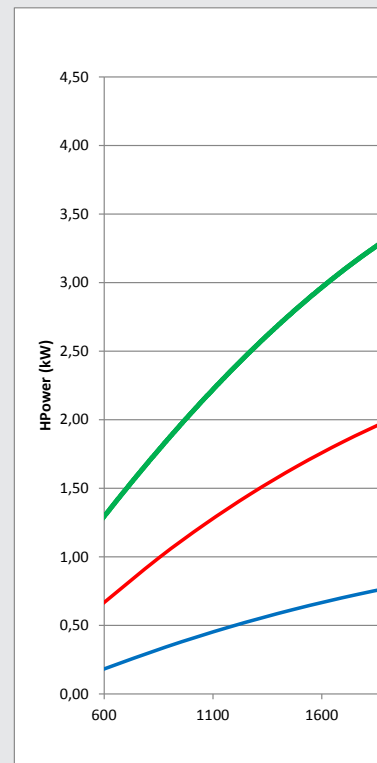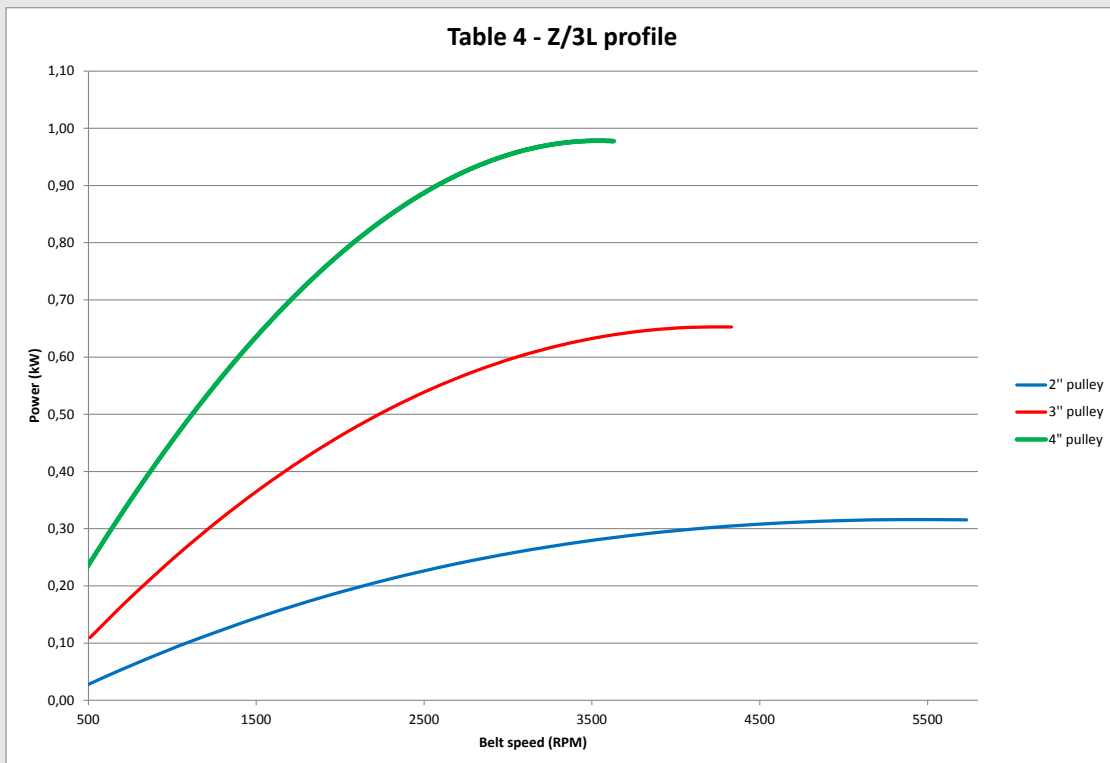

## Calculation example

### MACHINE DATA

P = 12 kW  
Speed: 1100 rpm  
Drive sheave: 8"  
Driven sheave: 12"  
Center distance: 38"

Application: compressor  
Type of engine: 1  
Working hours: 8-16 per day  
 $F_s$  will be 1,2

### CHOICE OF BELT SECTION

The corrected power  $P_c$  is

$$P_c = P \times F_s = 12 \times 1,2 = 14,4 \text{ kW}$$

Because of the high power, we can go for a C section, expecting more than one belt to be used.

### DETERMINATION OF ACTUAL POWER RATING

Arc of contact  $\gamma$

$$\gamma = 180 - (57 \times [(D-d):l]) = 180 - (57 \times [(12-8):38]) = 174^\circ$$

This means that  $C_\gamma$  is 0.98.

The belt power rating  $P_a$  is

$$P_a = P_b \times C_\gamma = 8 \times 0,98 = 7,84 \text{ kW}$$

where  $P_b$  comes from table 7.

### DETERMINATION OF NUMBER OF BELTS

The final number of belts is:

$$Q = P_c : P_a = 14,4 : 7,84 = 1,84$$

This means that the actual number of needed belts is 2.

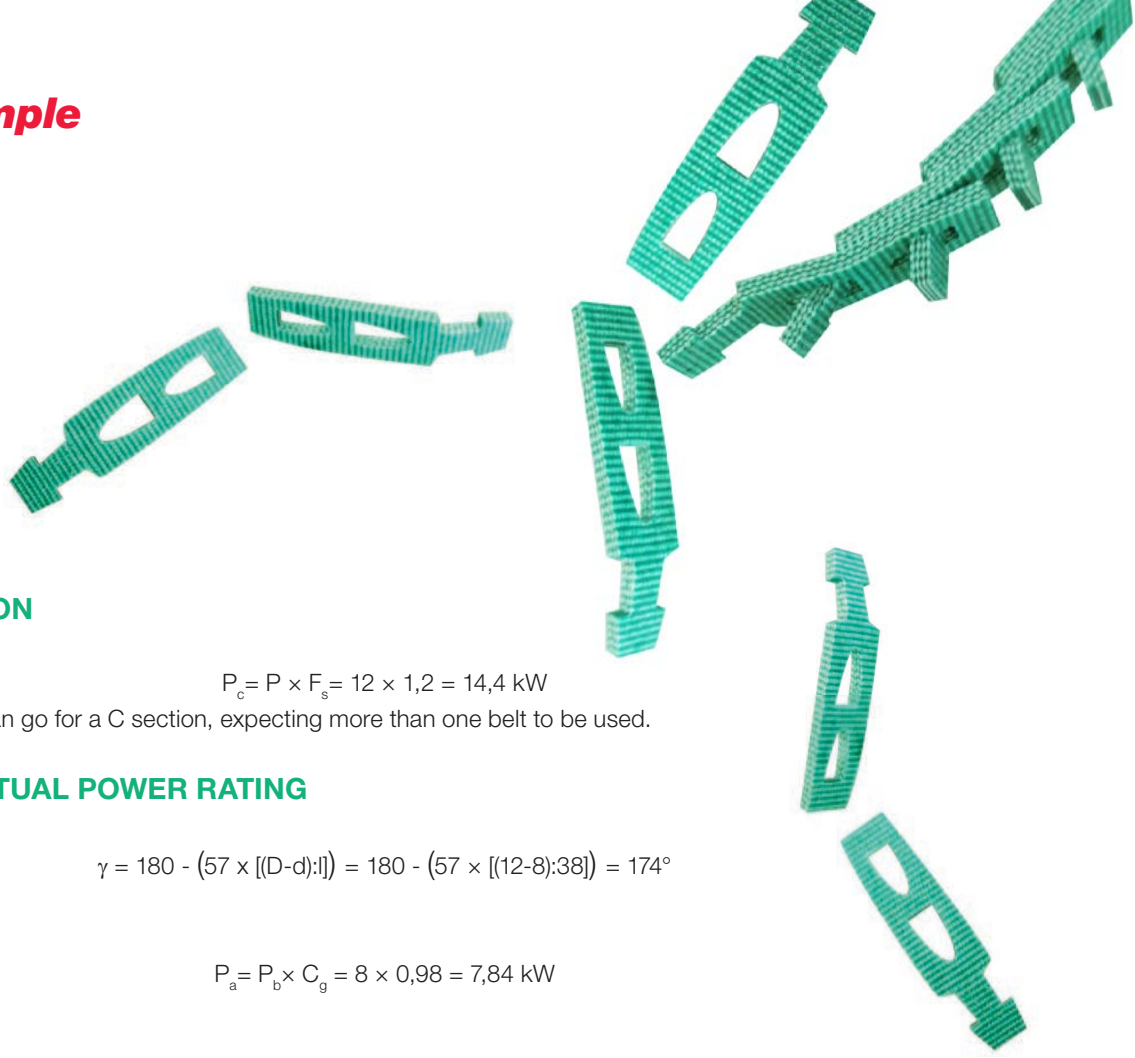


Table 5 - A/4L profile


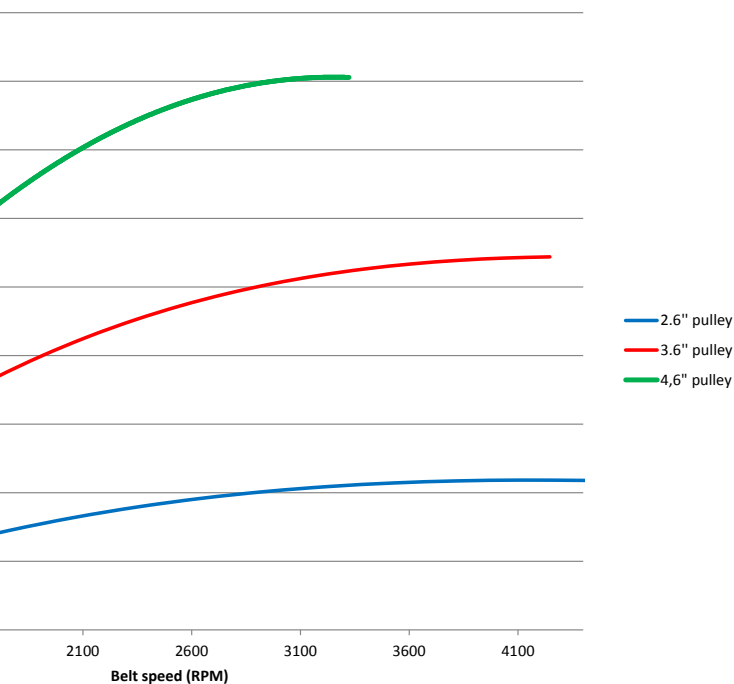




Table 6 - B/5L profile

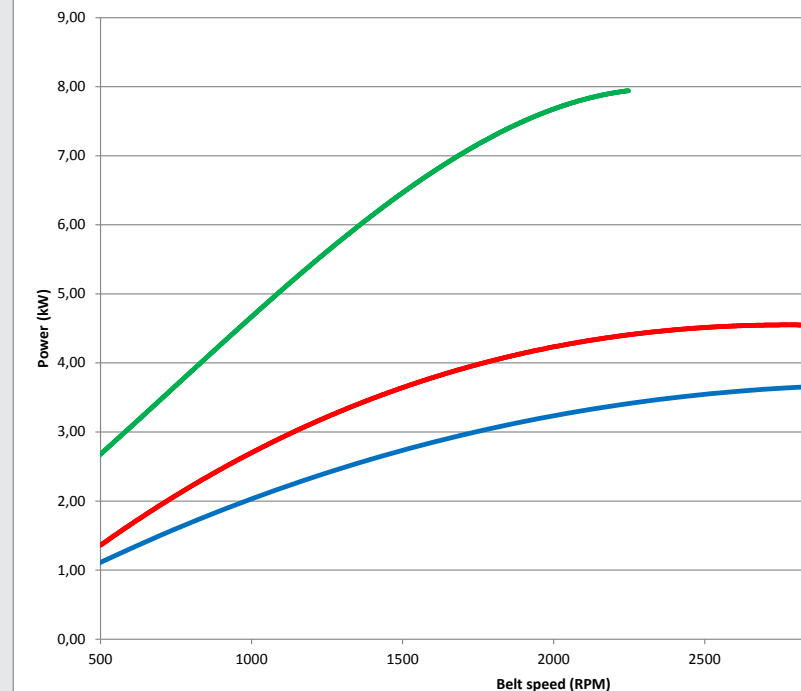

# Applications

Thanks to their features, Accu-Link belts can be used in very wide range of applications. In the following table it is possible to find a list of the main applications where Accu-Link are widely used with the advantages compared to the classical rubber V-Belts.

| APPLICATIONS                    | MAIN ADVANTAGES   |
|---------------------------------|---|
| Marine industry                 | Higher resistance to salty and greasy environment<br>Reduced inventory            |
| Air handling                    | Easier and quicker to install   |
| Metal and wood working machines | Reduced noise, reduced vibration  |
| Poultry industry                | Enhanced resistance to harsh environment  |
| Agriculture                     | Enhanced resistance to typical agri-environment                                   |
| Rolling conveyor                | Easier and quicker to install<br>Better performing in case of pulley misalignment |
| Glass industry                  | No staining   |
| Tiles and marble conveyor       | Easier and quicker to install<br>Enhanced resistance to harsh environment         |

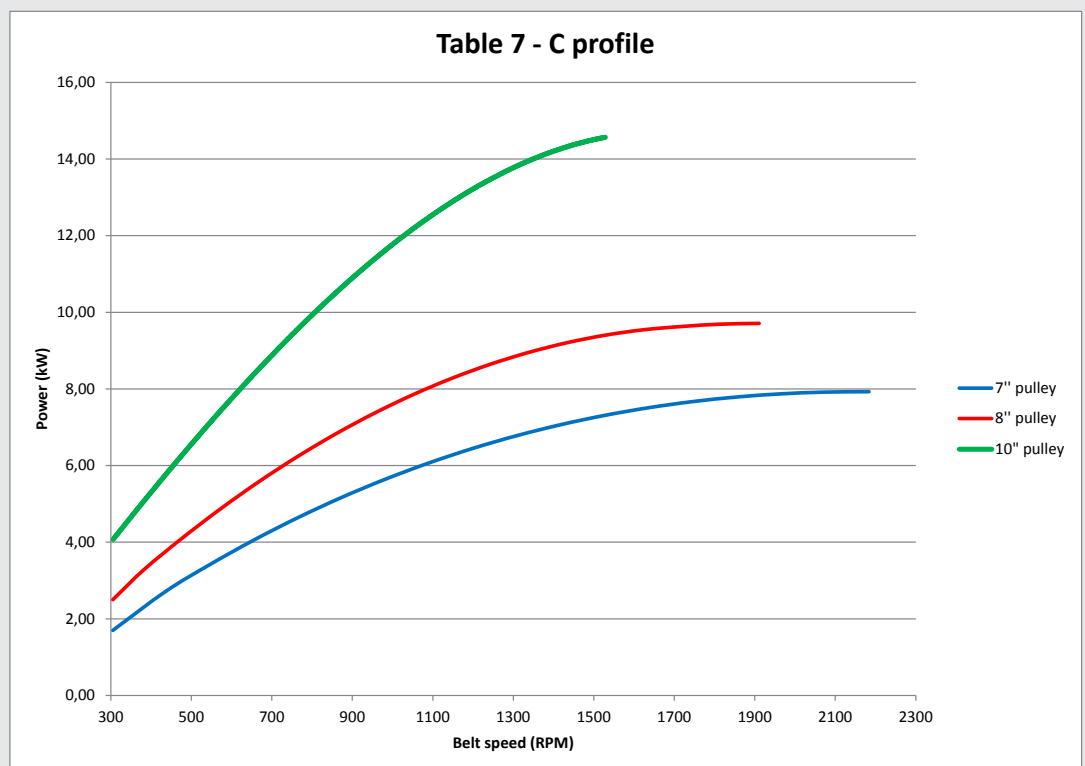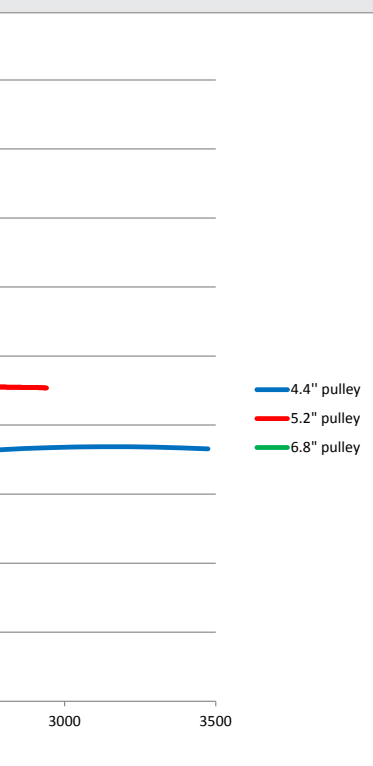

## Range

Accu-Link belts are available in Z/3L, A/4L, B/5L and C sections. Accu-Link can work on standard pulleys for V-belts. Megadyne can supply open end Acculink in carton boxes or endless belts in light carton sleeves.

|                              | Z/3L                              | A/4L   | B/5L   | C     |
|------------------------------|-----------------------------------|--------|--------|-------|
| Belt weight g/m (+/-1,5)     | 43,0                              | 76,5   | 117,5  | 178,5 |
| Min pulley diameter (mm)     | 45                                | 80     | 140    | 225   |
| Service temperature range    | -25 °C / +80 °C (-13 °F / 176 °F) |        |        |       |
| Standard roll lengths (ft)   | 25-100                            | 25-100 | 25-100 | 25-50 |
| Standard sleeve lengths (ft) | 5                                 | 5-6    | 6      | 5     |

## Measuring



1. Pull the belt tight around the sheaves to check the needed length, overlapping the last two tabs with two holes in matching.
2. Count the number of links and remove one link every 24 for Z/3L, A/4L and B/5L sections, and one link every 20 for C section to get the proper installation tension.
3. For multiple belt drives, be ensure that each belt has the same number of links.

## Assembling



1. Holding the belt with the tabs upwards, let the tab of one belt's end get through two links at once. (three if C section)



2. Flexing the belt as much as needed, twist and insert the second tab through the end link.



3. Ensure that tab will stay transversally to the belt's running direction; reverse the belt upside down to let it running on the tab side.

## Disassembling



1. Put the belt with the tabs upwards and bend it as much as possible.



2. Twist one tab 90° to make it parallel to the belt; in this way you can pull the end of the link over the tab.



3. Rotating the belt by 90° you can now easily pull one belt's end away from the other one.

**NOTE:** Unlike conventional V-Belts, Accu-Link can be rolled onto pulleys - no cord to break.

## Installation

1. Be sure that the belt has the tabs on the inner side: the belt has to run with the tabs oppositely facing the running direction;
2. Fit the belt in the nearest groove of the smallest sheave and then roll the belt onto the larger sheave. For multiple belts drive, repeat the operation on all the grooves
3. Always make sure that belts look pretty tight and tabs are still in the correct position.

If it is easy to move the engine, you might install the belt in the following way:

1. Set the engine in mid position of its adjustment range and mark this position clearly;
2. Check the belt's length as previously shown;
3. Move the engine forward to reduce the center distance;
4. Install the belt as in "INSTALLATION" paragraph;
5. Pull the engine back to the previously marked position.

## Retensioning

As in any V-Belt drive, Acculink belts require to check for tension after 24 h of full load operating time. If the belt is not tight enough, restore the tension by removing some link. Anyway, check the belt's tension periodically and restore tension.

**BELARUS**

**Minsk**  
Kuzme Chornogo 31 -901  
220100 Minsk  
Phone +375 17 2802486  
Info.ee@megadynegroup.com

**BRASIL**

**Sorocaba**  
Avenida Dr. Armando Pannunzio  
610 CEP 18050-000  
Sorocaba, São Paulo  
Phone +55 15 2101 7700  
inquiries@jasonindustrial.com

**CANADA**

**Edmonton**  
10020 42nd Avenue Edmonton  
Alberta T6E 5B4  
Phone: +1 780 461 4400  
inquiries@jasonindustrial.com

**Montreal**

9135 Cote De Liesse  
Dorval, Quebec H9P 2N9  
Phone: +1 514 31 2341  
inquiries@jasonindustrial.com

**Toronto**

927 Matheson Boulevard East  
Mississauga, Ontario L4W 2R7  
Phone: +1 905 602 4400  
inquiries@jasonindustrial.com

**CHINA**

**Beijing**  
NO.37-344 Fudongyuan.Ciqu Street  
Taihu town, Tongzhou  
Beijing 101111  
Phone +86 10 8150 7478  
info.cn@megadynegroup.com

**Foshan**

n.5 Hedang Industrial Area  
East Side Wu Gang Road  
Changcheng district, Foshan  
Guangdong 528031  
Phone +86 757 83815530  
info.cn@megadynegroup.com

**Fujian**

No.720 Marketing Comprehensive  
Building, South Lingshui Street  
Wuli Industrial Park,  
Jinjiang City, Fujian, 362261  
Phone +86 595 8816 0309  
info.cn@megadynegroup.com

**Ningbo**

Industrial Chemical Area,  
Fengxiang Road 777, Xiepu Town  
Zhenghai District,  
Ningbo City , Zhejiang Province,  
315203  
Phone +86 574 8650 2886  
info.cn@megadynegroup.com

**Qingdao**

Longshan town office,  
Nange backstreet Jimo city –  
Qingdao – Shandong, 266100  
Phone +86 532 8765 2117  
info.cn@megadynegroup.com

**Shanghai**

Business Office A area,  
6th Floor, 11th Building,  
No.1588, Li an Road  
Shanghai, 201105  
Phone +86 21 5447 1473  
info.cn@megadynegroup.com

**Shenyang**

Room303, Flat 3, No.131-9  
Baogong South St.  
Tiexi District  
Shenyang,110074  
Phone +86 24 2572 3238  
Fax +86 24 2572 3238  
info.cn@megadynegroup.com

**COLOMBIA**

**Cartagena**  
Diag 22-56-112  
Bario el Bosque  
Cartagena, Colombia  
NIT 900-648-909-6  
Phone: 011 57 313 501 5397  
inquiries@jasonindustrial.com

**CZECH REPUBLIC**

**Praha**  
Karlovarska Business Park  
Na Hurce 1077/4 (Budova C),  
161 00 –  
Praha 6 – Ruzyne  
Phone +420 2 8481 7181  
office.cz@megadynegroup.com

**FRANCE**

**Paris**  
Logistic Center Zi Les Bordes - 15  
Rue Gustave Madiot  
91923 Bondoufle Cedex  
Phone +33 1 6079 8200  
info.fr@megadynegroup.com

**St. Jean De Maurienne**

le près de la Garde -Av. Italie-  
73300 S. Jean de Maurienne  
Phone +33 4 7964 0613  
info.fr@megadynegroup.com

**GERMANY**

**Borchen**  
Nikolaus Otto Straße 24  
33178 Borchen  
Phone +49 5251 8735 0  
info.de@megadynegroup.com

**Elchingen**

Daimlerstraße 13  
89275 Elchingen  
Phone +49 7308 9665 0  
produktion@megadynegroup.com

**HUNGARY**

**Budapest**  
West Gate Business Park  
Topark u. 9  
2045 Torokbalint  
Phone +36 23 428 628  
info.hu@megadynegroup.com

**MEXICO**

**Mexico C.P.**  
Av. Ceylan 959 Int. 9 Y 10  
Industrial Vallejo Azcapotzalco,  
Mexico C.P. 02300  
Phone +52 55 5587 3680  
inquiries@jasonindustrial.com

**POLAND**

**Bydgoszcz**  
Ołowiana 10, 85-461 Bydgoszcz  
POLAND  
Phone +48 52 348 77 12  
info.pl@megadynegroup.com

**SOUTH AFRICA**

**Johannesburg**  
Unit 4 - 6, 24 Park Avenue South  
- Highway Business Park -  
Rooihuiskraal, Centurion  
Phone +27 (0)12 661 1652  
Fax +27 (0)12 661 1634  
info.sa@megadynegroup.com

**SPAIN**

**Barcelona**  
Ctra de l'Arboc, Km 1,7  
08800 Vilanova I La Geltru  
Barcelona  
Phone +34 93 811 5450  
info.sp@megadynegroup.com

**SWEDEN**

**Kristianstad**  
Estrids Väg 15  
291 65 Kristianstad  
Phone +46 10 1309600  
info.se@megadynegroup.com

**THAILAND**

**Bangkok**  
S.S.P. Tower – 16th Floor –  
Office 10 Soi Sukhumvit 63  
(Ekamai) Klong Tan Nuea,  
Vadhana Bangkok 10110  
Phone: +66 (0) 27115477  
info.apac@megadynegroup.com

**TURKEY**

**Izmir**  
Mustafa Kemal Atatürk Mahallesi  
Izmir Ankara Asfalti Caddesi  
No:19, 35170 Ulucak Kemalpaşa  
Phone +90 232 877 07 00  
info@rultrans.com.tr

**U.K.**

**Birmingham**  
Unit 1, The Washington Centre,  
Halesowen Road, Netherton,  
Dudley, West Midlands, DY2 9RE  
Phone: +44 1384 215 021  
sales@megadynegroup.com

**U.S.A**

**California**  
5660-5680 Rickenbacker Road Bell  
Los Angeles, CA 90201  
Phone +1 323 265 8061  
inquiries@jasonindustrial.com

**Florida**

5120-B East Adamo Drive Tampa,  
FL 33619  
Phone +1 813 241 4111  
inquiries@jasonindustrial.com

**Georgia**

Belt Corporation of America  
253 Castleberry Industrial Dr.  
Cumming, GA 30040  
Phone +770 887-9725  
inquiries@jasonindustrial.com

**Illinois**

221 South Westgate Drive  
Carol Stream, IL 60188  
Phone: +1630 752 0600  
inquiries@jasonindustrial.com

**New Jersey Americas HQ**

340 Kaplan Drive Fairfield  
NJ 07004  
Phone +1 973 227 4904  
inquiries@jasonindustrial.com

**North Carolina**

11016 Granite Street, Charlotte,  
NC 28273  
Phone +1 704 583 5388  
inquiries@jasonindustrial.com

**Oregon**

One SE Alder St., Portland,  
OR 97214  
Phone +1 888 231 7224  
inquiries@jasonindustrial.com

**South Carolina**

101 Pelham Davis Cir, Greenville,  
SC 29615-5752  
Phone +1 864 288 9916  
inquiries@jasonindustrial.com

**Texas**

8510 Ambassador Row, Dallas  
TX 75247  
Phone +1 972 438 6992  
inquiries@jasonindustrial.com

**HEADQUARTERS****ITALY Torino**

Via S. Lucia, 114  
10075 Mathi (Torino)  
Phone +39 011 926 8052  
info@megadynegroup.com

[www.megadynegroup.com](http://www.megadynegroup.com)  
[www.jasonindustrial.com](http://www.jasonindustrial.com)

